

## Technical specifications

### EN16719 COMPLIANT FEATURES

- Monitored erection crane bracket
- Emergency brake release sealed for proof of operation
- Additional interlocking of unloading ramp operation
- Falling object protection system (FOPS)
- New simpler to use leveling jacks
- Base enclosure




	TPL 1000
Payload capacity (kg)	1000
Number of persons max (included on payload) TP mode / MH mode	5 / 0
Lifting speed (TP / MH mode)	12 / 24 m/min
Platform dimensions (WxL)	1.4 m x 1.6 m
Max. lifting height, tied*	100 m
Max. tie distance	7.5 m
Max. overhang	3 m
Max. first anchor position	6 m
Power supply	400V 50Hz 3Ph
Rated power (TP / MH mode)	3.8 / 7.6 kW
Rated current (TP / MH mode)	8.4 / 15.7 A
Power consumption (TP / MH mode)	5.5 / 11 kVA
Type of mast	Triangular, 350 mm, tubular steel with integrated eye bolts

\* Increased lifting height on request.


# ALIMAK TPL 1000

## MAIN DIMENSION

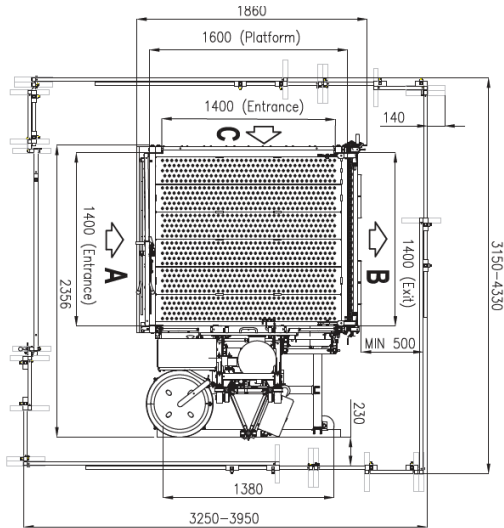

TPL 1000	Weights (kg)
Base Unit	1000
Mast	55
Tie In	43
Cable Guide	4

## DIFFERENT ALTERNATIVE RAMP/DOOR SYSTEM

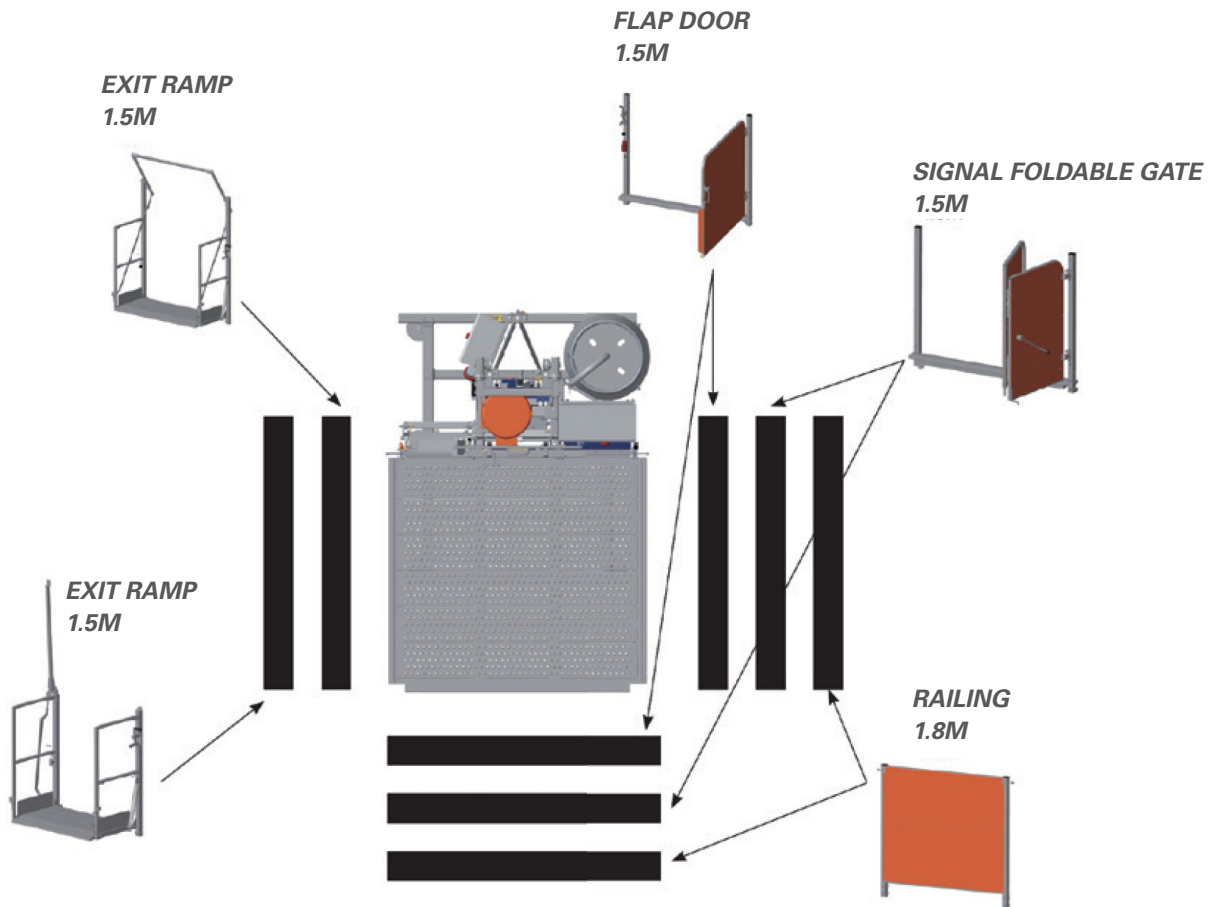

[www.alimak.com](http://www.alimak.com)



Pictures are illustrative only and do not necessarily show the configuration of products on the market at a given point in time. Products must be used in conformity with safe practice and applicable statutes, regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice. Copyright © 2020 Alimak Group AB. All rights reserved. Alimak and Scando are registered trademarks of Alimak Group AB.