

Technical specifications

EN16719 COMPLIANT FEATURES

- Monitored erection crane bracket
- Emergency brake release sealed for proof of operation
- Additional interlocking of unloading ramp operation
- Falling Object Protection System (FOPS)
- New simpler to use leveling jacks
- Base enclosure




	TPL 800
Payload capacity (kg)	800
Number of persons max (included on payload) TP mode / MH mode	5 / 0
Lifting speed (TP / MH mode)	12 / 24 m/min
Platform dimensions (WxL)	1.0 m×3.2 m
Max. lifting height, tied*	100 m
Max. tie distance	7.5 m
Max. overhang	3 m
Max. first anchor position	6 m
Power supply	400 V 50 Hz 3 Ph
Rated power (TP / MH mode)	3.8 / 7.6 kW
Rated current (TP / MH mode)	8.4 / 15.7 A
Power consumption (TP / MH mode)	5.5 / 11 kVA
Type of mast	Triangular, 350 mm, tubular steel with integrated eye bolts

* Increased lifting height on request.


ALIMAK TPL 800

MAIN DIMENSION

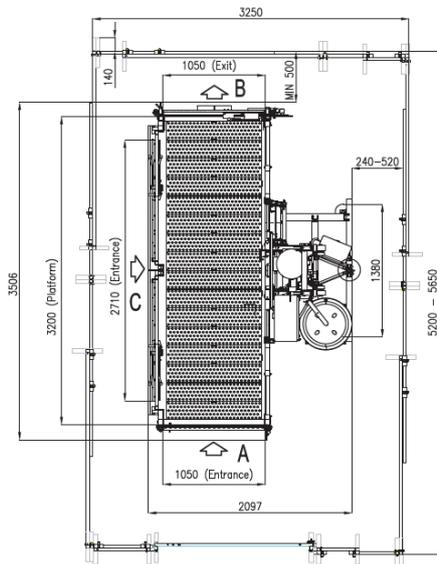

TPL 800	Weights (kg)
Base Unit	1150
Mast	54
Tie In	51
Cable Guide	4

DIFFERENT ALTERNATIVE RAMP/DOOR SYSTEM

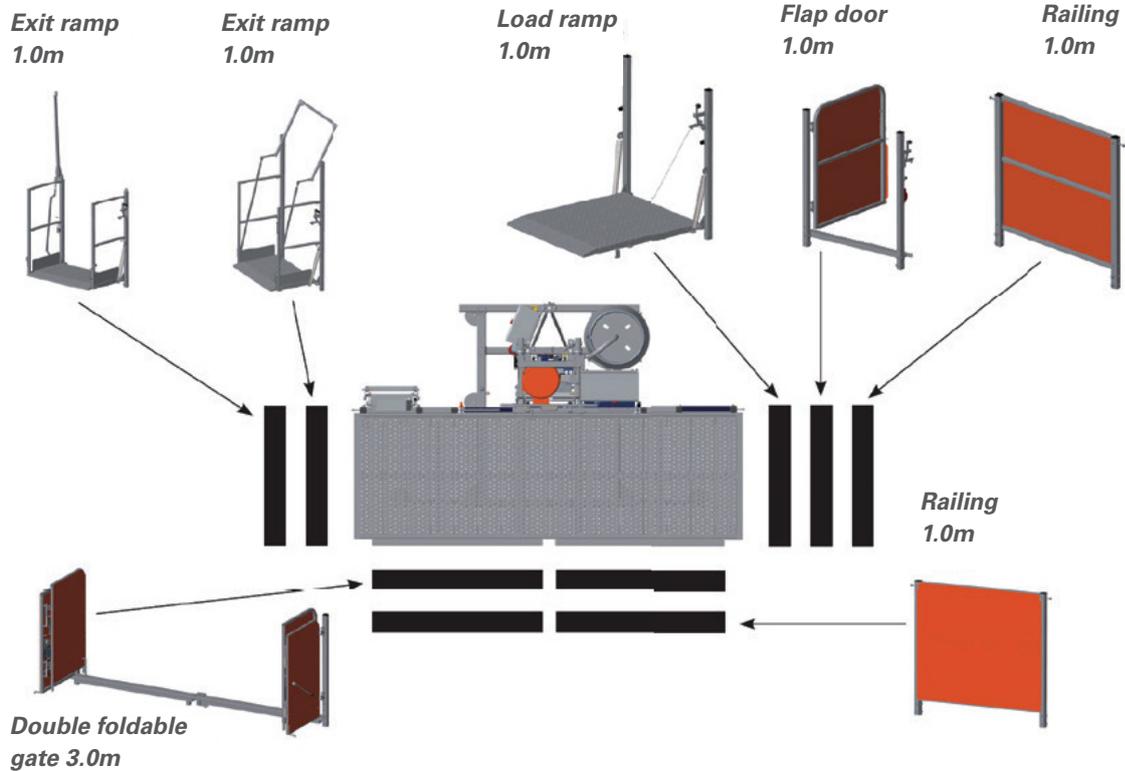

www.alimak.com



Pictures are illustrative only and do not necessarily show the configuration of products on the market at a given point in time. Products must be used in conformity with safe practice and applicable statutes, regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice. Copyright © 2020 Alimak Group AB. All rights reserved. Alimak and Scando are registered trademarks of Alimak Group AB.